

PRESIDENT

BARRY II+

AM / FM

12 / 24 V

SIMPLY UNIQUE

+ PRESIDENT
CHANNELS



Non-contractual photo

FEATURES

- P Channels
 - NRC (TX + RX)
 - Scan / Skip
 - Mic U/D (function on/off)
 - Large multifunction LCD display
 - 7 Color display
 - Key Beep / Roger Beep
 - ANL built-in / NB / TB / NG / Vox / PA
 - 2 Emergency programmable channels (EMG)
 - USB charging plug
 - Reset
 - ...
- Supplied accessories:
 - 1 Electret UP/DOWN microphone
 - 1 Support
 - 1 Mounting cradle
 - Screws and fused power cord

Art. N° TXPR122



3 4 3 5 9 9 1 1 0 4 1 3 5



*See warranty conditions on our website
Groupe **PRESIDENT** ELECTRONICS since 1978
S.A. Capital 10.000.000 € 2273/07-24 - C0503
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : <http://www.president-electronics.com>
e-mail : groupe@president-electronics.com

Compatible
REMOTE BT MIKE
REMOTE MIKE

ASC Automatic
Squelch
Control


VOX built in

N.R.C.
NOISE REDUCTION CIRCUIT



BARRY II+

Functions

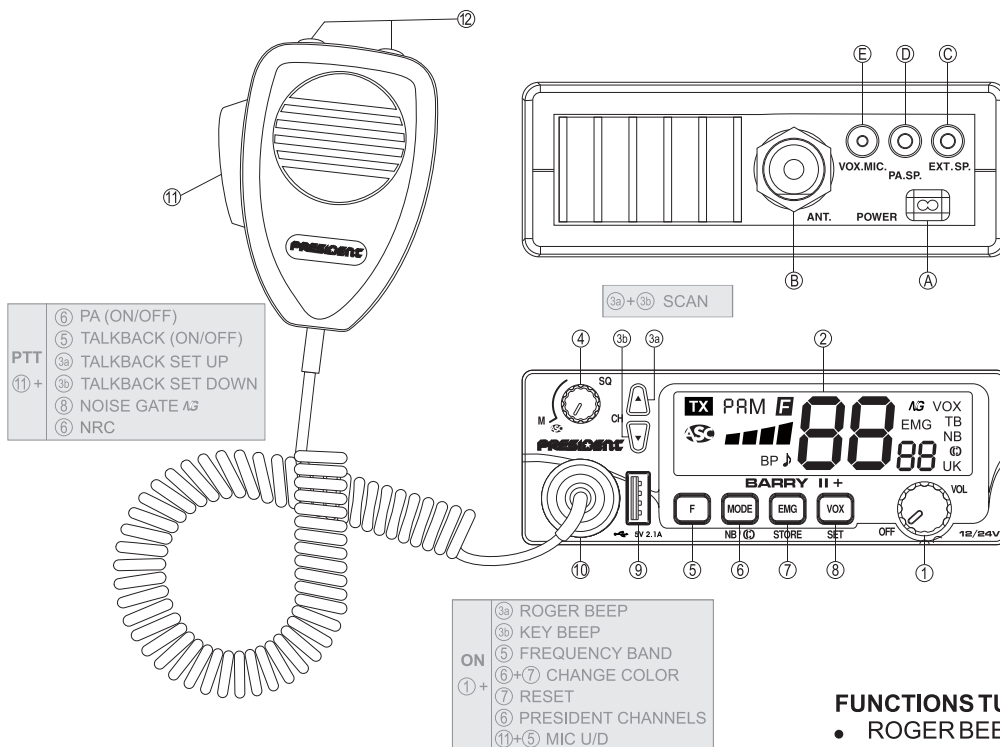

- A) DC-POWER TERMINAL (13.2V/26.4V)
- B) ANTENNA CONNECTOR (SO-239)
- C) EXTERNAL SPEAKER JACK (8Ω, Ø3.5mm)
- D) PASPEAKER JACK (8Ω, Ø3.5mm)
- E) OPTIONAL VOX MIKE (Ø2.5mm)

- PTT
- ⑥ PA (ON/OFF)
 - ⑤ TALKBACK (ON/OFF)
 - ③a TALKBACK SET UP
 - ③b TALKBACK SET DOWN
 - ⑧ NOISE GATE AG
 - ⑥ NRC

- ON
- ③a ROGER BEEP
 - ③b KEY BEEP
 - ⑤ FREQUENCY BAND
 - ⑥+⑦ CHANGE COLOR
 - ⑦ RESET
 - ⑥ PRESIDENT CHANNELS
 - ①+⑤ MIC U/D

- 1) ON/OFF ~ VOLUME
- 2) DISPLAY
- 3) CHANNEL SELECTOR
- 4) ASC (Automatic Squelch Control) ~ SQUELCH
- 5) F ~ FREQUENCY BAND SELECTION ~ SKIP
- 6) MODE ~ NB & NRC ~ NRC SET
- 7) EMG ~ EMG SET
- 8) VOX ~ VOX SET
- 9) USB CHARGING PLUG
- 10) 6 PIN MICROPHONE PLUG
- 11) PTT (Push To Talk) ~ TOT (Time Out Timer)
- 12) CHANNEL SELECTOR

FUNCTIONS TURNING ON THE UNIT

- ROGER BEEP (▲ or UP)
- KEY BEEP (▼ or DN)
- F ~ FREQUENCY BAND SELECTION (F)
- COLOR (MODE + EMG)
- P CHANNELS (ON + MODE)
- RESET (ON + EMG)
- MIC U/D (ON + PTT + F)

FUNCTIONS WITH PTT SWITCH

- TALKBACK (PTT + F)
- TALKBACK LEVEL (PTT + ▲/▼)
- PA (PTT + MODE)
- NOISE GATE (PTT + VOX)
- NRC (PTT + MODE)

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2V / 26.4V
- Dimensions (mm) : 125 (W) x 180 (D) x 45 (H)
- Weight : ±0.9 kg
- Supplied accessories : Electret UP/DOWN microphone with support, mounting cradle, screws and fused power cord.
- Filter : ANL (Automatic Noise Limiter) built-in

2) TRANSMISSION

- Frequency allowance : ±200 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 μW
- Microphone sensitivity : 7 mV
- Max. drain : 1.7A (13.2V)
0.85A (26.4V)
- Modul. signal distortion : 2%

3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm (AM)
0.35 μV - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 2.5 W
- Squelch sensitivity : min. 0.2 μV - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : 160 ~ 420 mA (13.2V)
100 ~ 250 mA (24.6V)

Specifications



All European standards

