
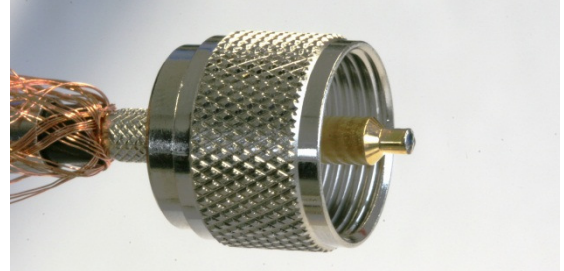
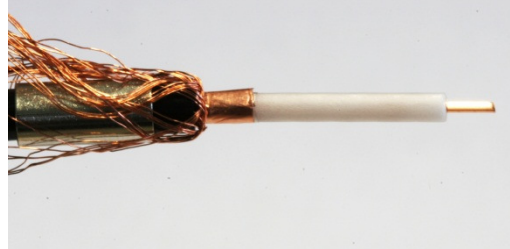
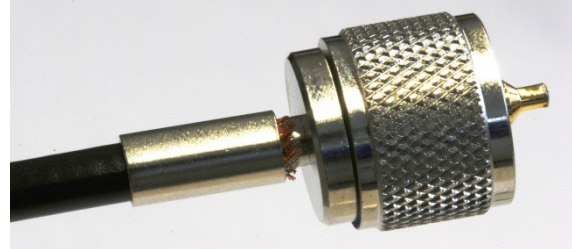
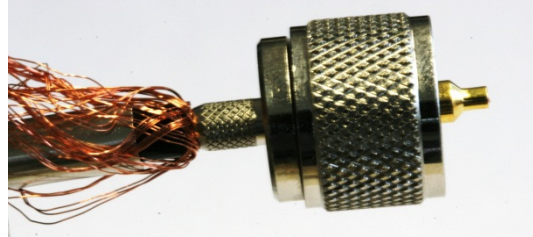
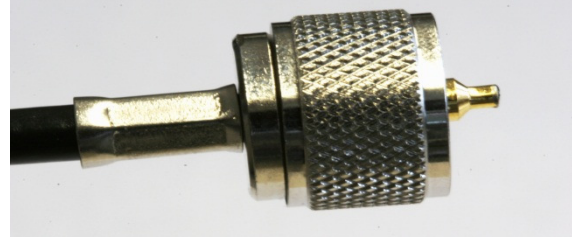


## Mounting instruction

AIRCELL®5

UHF-Connector, crimp/ Art. No. 7762

 <p><b>1.</b> Cut off cable tail right-angled. Move the crimp-cover over the cable head. Cut off 27 mm of the outer sheath with a knife.</p>	 <p><b>4.</b> Solder the inner conductor and the inner pin at the tip.</p>
 <p><b>2.</b> Bend copper braid backwards. Slit slightly 22 mm of the copper foil and remove it. Then remove 5 mm of the dielectric.</p>	 <p><b>5.</b> Cut off the copper braid with a side cutter and move the crimp jacket to the front.</p>
 <p><b>3.</b> Insert the prepared cable head into the connector housing as far as it will go.</p>	 <p><b>6.</b> Crimp the crimp jacket with a crimp tool; herewith the copper braid will be trapped between the crimp jacket and the connector housing.</p>