PRESIDENT

RANDY III+

AM / FM
7.4 / 13.2 V

SIMPLY POLYVALENT



Non-contractual photo

FEATURES

- **President Channels**
- **NRC**
- 7.4 V (Portable configuration)
- 13.2 V (Mobile configuration)
- Key Beep / Roger Beep
- 38 CTCSS tones / 104 DCS codes
- ANL / NB / Hi-Cut / NG
- Large multifunction LCD / Frequency display / 7 Color display
- ASC / Manual Squelch
- Vox (Hands-free function)
- Scan / Scan Skip / Dual Watch / Lock
- 2 Emergency programmable channels (EMG)

«SCAN SKIP»

Art. N° TXPR613

3 435991 104227

- Supplied accessories:
  - Flexible antenna
  - Microphone support
  - Belt clip
  - Wrist wrap
  - AC power supply
  - Home charger
  - Mobile charge module
  - Battery pack - 1800 mA (Lithium Ion)
  - Fuse


*See warranty conditions on our website

Groupe PRESIDENT ELECTRONICS since 1978
S.A. Capital 10.000.000 €
2349/06-25 - C0531
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : http://www.president-electronics.com
e-mail : groupe@president-electronics.com

All european standards · N°1 CB PRESIDENT · 100% RoHS 2 EU NORM · MADE BY 100 % QUALITY PRESIDENT · 2+3* years warranty · CE

RANDY III+

Functions

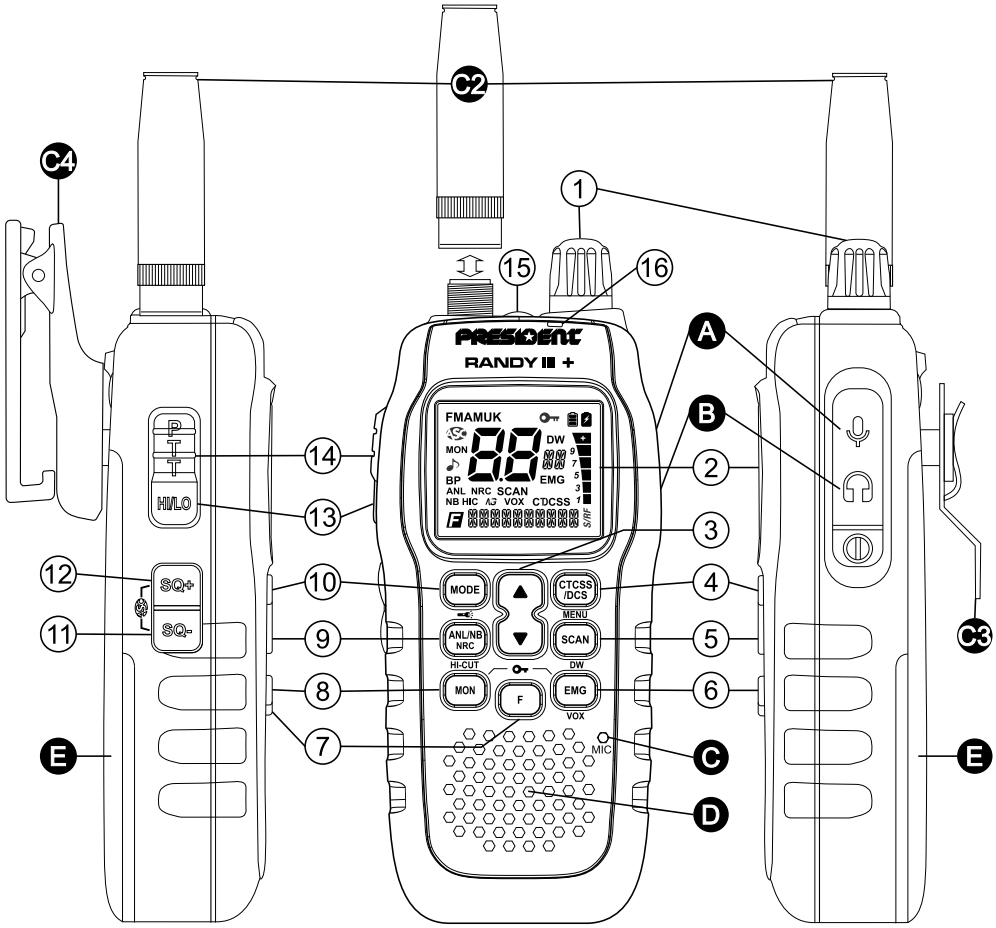

MENU
1) COLOR
2) ROGER BEEP
3) KEY BEEP
4) ECO MODE
5) TONE
6) EMG SET
7) VOX SET
8) DW SET
9) CODE TYPE
10) SCAN SKIP
11) PRESIDENT CHANNEL
12) RX NRC
13) TX NRC
14) RESET

FUNCTION TURNING ON THE UNIT
- F ~ FREQUENCY BAND SELECTION (F)

FUNCTION WITH PTT SWITCH
- NOISE GATE

CHARGING THE RANDY III
- USING THE AC ADAPTER
- USING THE CIGAR LIGHTER PLUG
- CHANGING BATTERY PACK

1) ON/OFF ~ VOLUME
2) DISPLAY
3) CHANNEL SELECTOR
4) CTCSS / DCS ~ MENU
5) SCAN ~ DW ~ SKIP
6) EMG ~ VOX
7) F ~ FREQUENCY BAND SELECTION
8) MONITOR
9) ANL / NB ~ HI-CUT ~ NRC
10) MODE ~ FLASHLIGHT
11) MANUAL SQUELCH-
12) MANUAL SQUELCH+
11 + 12) ASC (Automatic Squelch Control)
13) HI/LO TRANSMITTING POWER
14) PTT (Push To Talk) ~ TOT (Time Out Timer)
15) FLASHLIGHT
16) LED
6 + 8) LOCK

Specifications

1) GENERAL

- Channels	: 40
- Modulation modes	: AM / FM
- Frequency range	: 26.965 to 27.405 MHz
- Antenna impedance	: 50 ohms
- Power supply	: 13.2 V (mobile configuration) 7.4 V (portable configuration)
- Dimensions	: 5.98 (H) x 2.62 (W) x 1.46 (D) inches 152 (H) x 66,5 (W) x 37 (D) mm
- Weight (without antenna and with battery)	: 0.67 lb 305 g
- Supplied accessories	: See website.

2) TRANSMISSION

- Frequency allowance	: ± 200 Hz
- Carrier power	: 4 W
- Transmission interference	: < 4 nW (- 54 dBm)
- Audio response	: 300 Hz to 2.5 KHz
- Emitted power in the adj. channel	: < 20 µW
- Microphone sensitivity	: 7 mV
- Max. drain	: 1.8 A
- Modul. signal distortion	: 2 %

3) RECEPTION

- Max. sensitivity at 20 dB sinad	: 0.5 µV - 113 dBm (AM) 0.3 µV - 116 dBm (FM)
- Frequency response	: 300 Hz to 3 kHz
- Adj. channel selectivity	: 60 dB
- Max. audio power	: 1 W
- Squelch sensitivity	: min. 0.2 µV - 120 dBm max. 1 mV - 47 dBm
- Frequency image rejection rate	: 60 dB
- Intermediate frequency rejection rate	: 70 dB
- Drain	: See ECO MODE
- Internal speaker	: 16 ohms, 1 W

All European standards

2349/06-25 - C05531b