

PRESIDENT

JERRY

AM / FM

7.4 / 13.2 V

SIMPLY HANDY

FEATURES

- 7.4 V (Portable configuration)
- 13.2 V (Mobile configuration)
- Key Beep / Roger Beep
- ANL / NB / Hi-Cut /
- Noise Gate
- Large multifunction LCD / Frequency display
- ASC / Manual Squelch
- Vox (Hands-free function)
- Scan / Scan Skip
- 2 Emergency programmable channels (EMG)
- Dual Watch / Lock
- ...

- Supplied accessories:
 - Flexible antenna S-20
 - Mobile charge module
 - Battery pack 1800 mA (Lithium-Ion)
 - Fuse
 - Owner's manual

«SCAN
SKIP»

Art. N° TXPR612



3 4 3 5 9 9 1 1 0 4 1 1 1



Non-contractual photo


*See warranty conditions on our website

Groupe **PRESIDENT** ELECTRONICS since 1978
S.A. Capital 10.000.000 € 2253/03-24 - C0496
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : <http://www.president-electronics.com>
e-mail : groupe@president-electronics.com



VOX built in



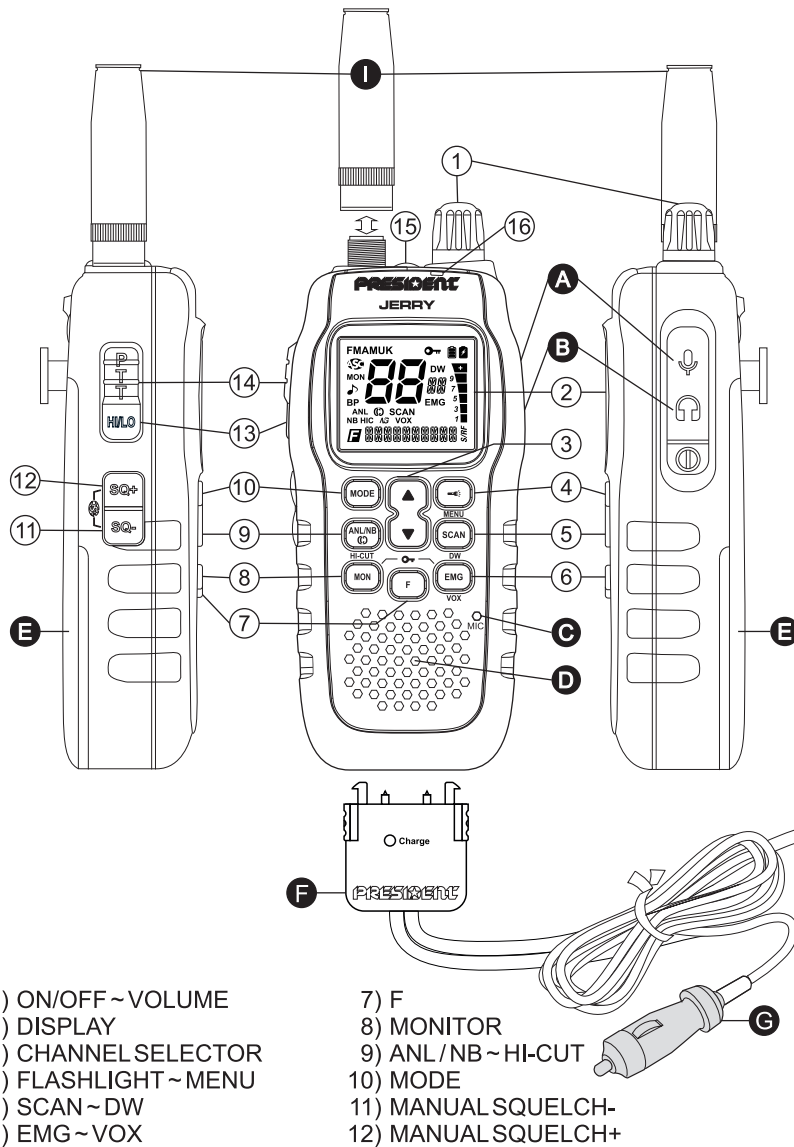

- A) EXTERNAL MICROPHONE PLUG
- B) EXTERNAL SPEAKER PLUG
- C) INTERNAL MICROPHONE
- D) INTERNAL SPEAKER
- E) BATTERY PACK DOOR
- F) MOBILE CHARGE MODULE
- G) CIGAR LIGHTER PLUG
- H) EXTERNAL ANTENNA PLUG
- I) FLEXIBLE ANTENNA

MENU

- ROGER BEEP
- KEY BEEP
- ECO MODE
- TONE
- EMG SET
- VOX SET
- DW SET
- SCAN SKIP
- RESET

FUNCTION TURNING ON THE UNIT

- F ~ FREQUENCY BAND SELECTION (F)

FUNCTION WITH PTT SWITCH

- NOISE GATE

CHARGING THE JERRY

- USING THE MOBILE CHARGE MODULE
- CHANGING BATTERY PACK
- LOW BATTERY FEATURES

- 1) ON/OFF ~ VOLUME
- 2) DISPLAY
- 3) CHANNEL SELECTOR
- 4) FLASHLIGHT ~ MENU
- 5) SCAN ~ DW
- 6) EMG ~ VOX

- 7) F
- 8) MONITOR
- 9) ANL/NB ~ HI-CUT
- 10) MODE
- 11) MANUAL SQUELCH-
- 12) MANUAL SQUELCH+

- 11 + 12) ASC (Automatic Squelch Control)
- 13) HI/LO TRANSMITTING POWER
- 14) PTT (Push To Talk) ~ TOT (Time Out Timer)
- 15) FLASHLIGHT
- 16) LED
- 6 + 8) LOCK

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V (mobile configuration)
7.4 V (portable configuration)
- Dimensions : 5.98 (H) x 2.62 (W) x 1.46 (D) inches
152 (H) x 66,5 (W) x 37 (D) mm
- Weight (without antenna and with battery) : 0.67 lb
305 g
- Supplied accessories : See website.

2) TRANSMISSION

- Frequency allowance : ± 200 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 μ W
- Microphone sensitivity : 7 mV
- Max. drain : 1.8 A
- Modul. signal distortion : 2 %

3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5 μ V - 113 dBm (AM)
0.3 μ V - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 1 W
- Squelch sensitivity : min. 0.2 μ V - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Drain : See owner's manual
- Internal speaker : 16 ohms, 1 W

Specifications



All European standards

